



DE LOREAN MOTOR COMPANY

SERVICE BULLETIN


NUMBER ST-02-6/81

CATEGORY: TECHNICAL

ATTENTION: ALL DMC DEALERS/SERVICE MANAGERS

SUBJECT: DOOR KEY INSERTION

In order to properly insert the door key into the door lock's key slot, the slide plate, covering the key slot, must first be pushed aside with the key. This is best done by placing the tip of the key at an angle into the "crescent-shaped" recess, sliding the cover plate aside with the tip of the key and then inserting the key (Figure 1).

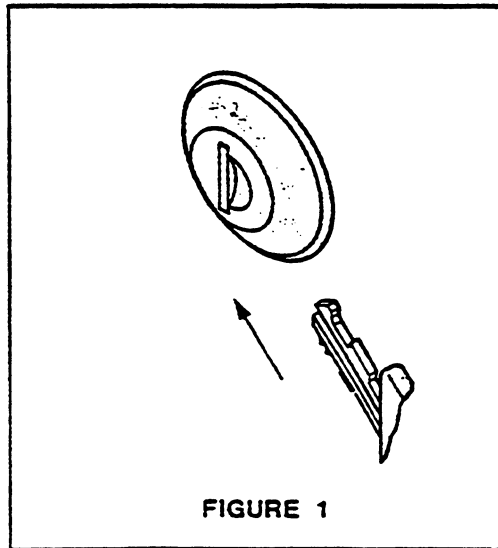

New vehicle owners should be informed of this technique when their vehicle is being delivered.

Sincerely,

Lutz Feuerabendt
Technical Service Manager

ISSUED 6/25/81